KHANAPUR / HYDERABAD


EV hub & café destination

MASTER SITE PLAN / 800 sq yds / West-facing / 2D civil coordination

C-01

01 / SITE SET-OUT

ORIGIN: SOUTHWEST CORNER · X EAST / Y NORTH

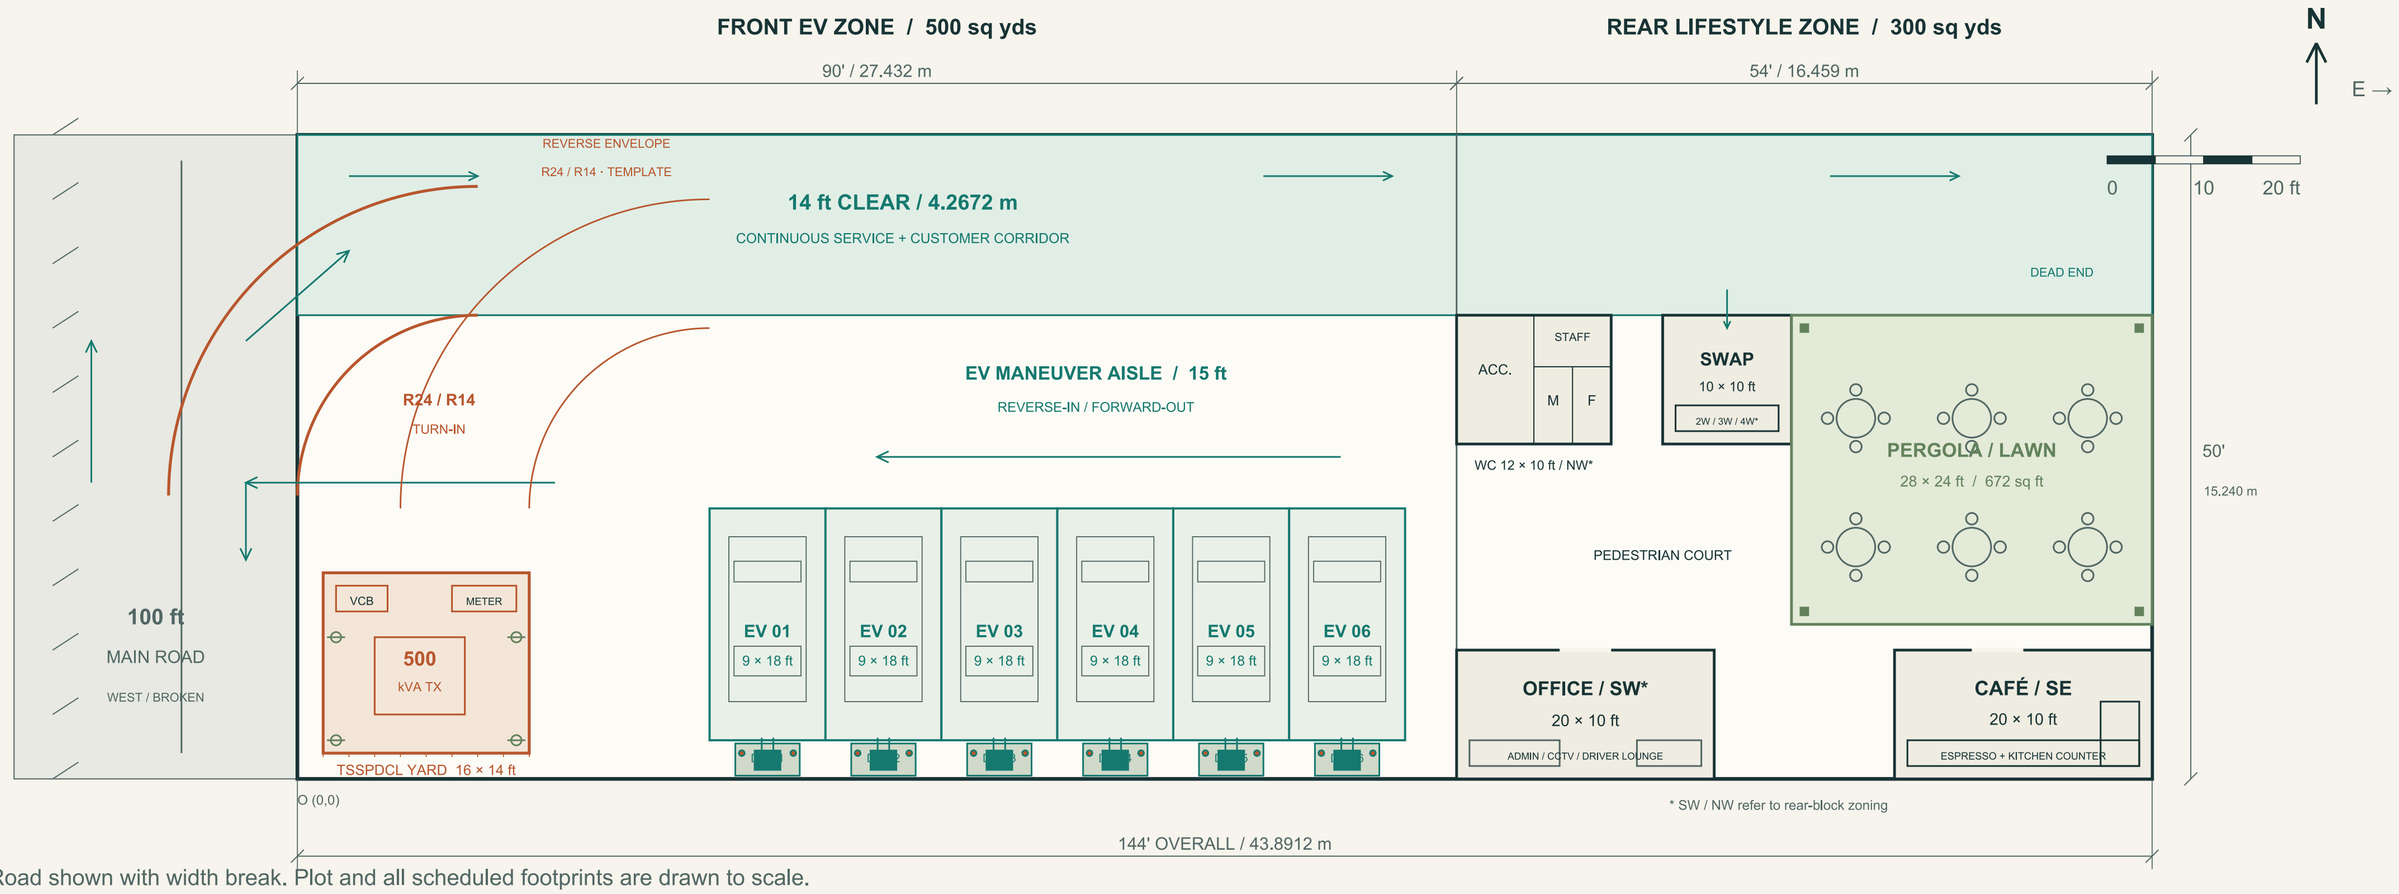

Road shown with width break. Plot and all scheduled footprints are drawn to scale.

Solid arcs: turn-in. Dashed arcs: reverse template. R24 / R14 = 7.3152 / 4.2672 m; vehicle simulation pending.

02 / CHARGING & ACCESS

6 bays · 9 × 18 ft each · 972 sq ft total

Dual-gun CCS2 · 120 kW / 240 kW option

Concrete islands + protective bollards

North corridor: 14 ft clear, full 144 ft length

Rear vehicle access is a dead end; no fire tender turn.

03 / SET-OUT SCHEDULE

Café 124–144 / 0–10 ft Office 90–110 / 0–10 ft

Lawn 116–144 / 12–36 ft Swap 106–116 / 26–36 ft

WC 90–102 / 26–36 ft Yard 2–18 / 2–16 ft

Coordinates shown as X range / Y range.

No fixed footprint intersects the north corridor.

04 / DESIGN BASIS

Rear-block Vastu zoning; see P-01 matrix.

15 ft bay aisle: verify chosen design vehicle.

TSSPDCL yard clearance and setbacks unapproved.

4W swapping compatibility is vendor-dependent.

No structural container engineering in this scope.

CONTEST 2799418 / COORDINATION ISSUE 01

NOT FOR CONSTRUCTION · Unstamped; survey, utility and licensed-design checks outstanding.

SITE 1:100 / DIMENSIONS GOVERN

2026-11-08 / C-01 / 24 × 18 in at 100% print

KHANAPUR / HYDERABAD


Power, water & groundworks

E-01


UTILITY ROUTING / Dedicated electrical trench / Separate wet-service corridors

01 / UNDERGROUND COORDINATION PLAN

SIZES FROM DESIGN BRIEF · FINAL SIZING SUBJECT TO CALCULATIONS

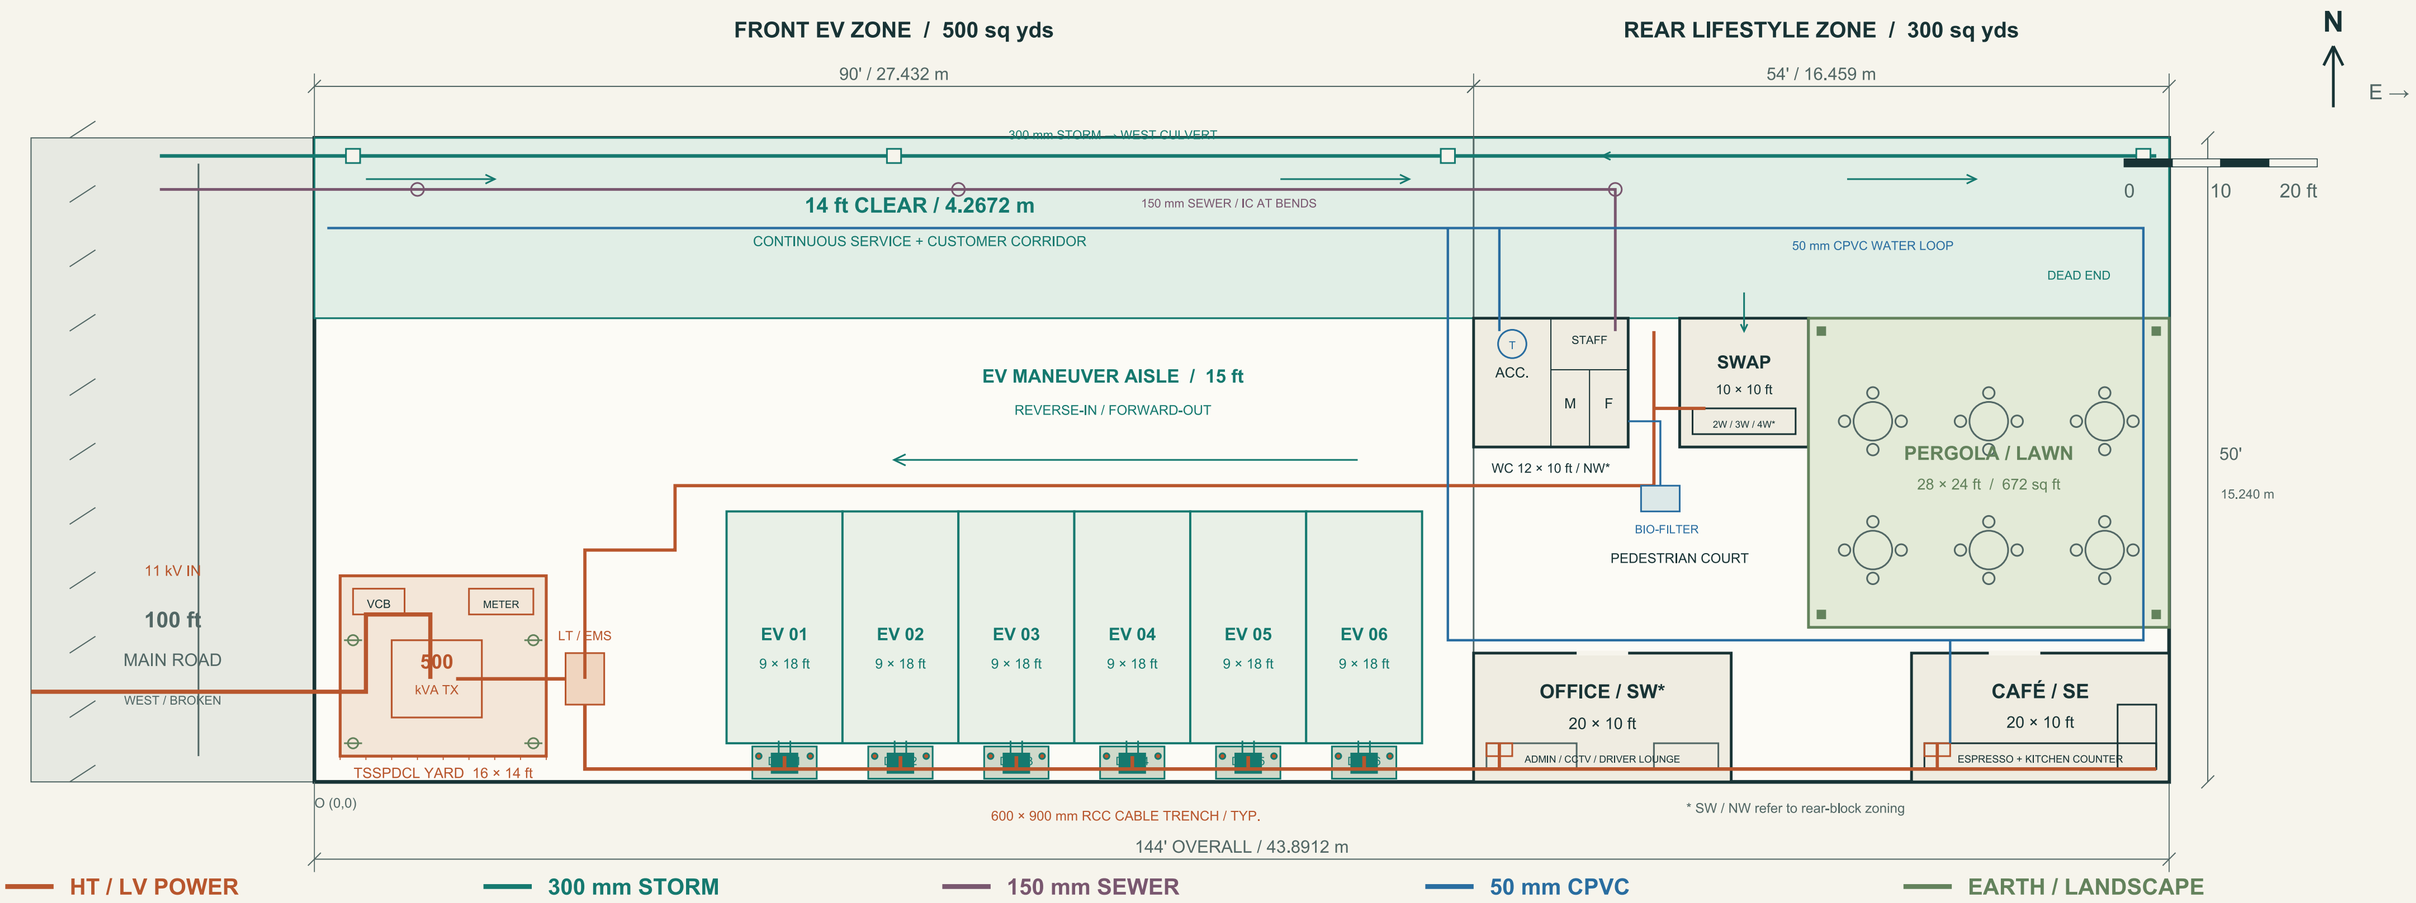

02 / RCC TRENCH SECTION

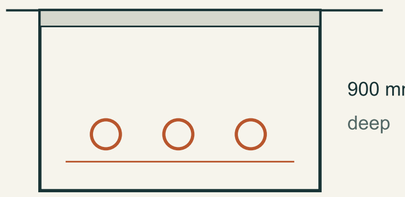

RCC cover
Traffic-rated
Cable supports
Sand bedding
HT/LV divider
Section NTS

03 / LOAD & CABLE SCHEDULE

500 kVA · 11/0.433 kV TX → VCB / meter → LT
3×300 sq.mm Al XLPE: brief basis; cores / runs TBD.
600×900 mm trench → DC-01…06 + rear DBs.
EMS cap: 400 kW AC; auxiliary allowance 40 kW.
At 95% efficiency: 342 kW aggregate DC budget.
Six 120 kW units need 720 kW DC if uncapped.

04 / DRAINAGE DESIGN BASIS

300 NP2 storm: assumed 0.5% fall east → west.
43.891 m run gives 219 mm fall (verify outfall).
150 uPVC foul: nominal 1% gradient to road IC.
50 CPVC ring + OHT feed + isolated branches.
Keep wet services separate; sleeve crossings.
No road sewer confirmed; septic option unlocated.

CONTEST 2799418 / COORDINATION ISSUE 01

NOT FOR CONSTRUCTION · Unstamped; survey, utility and licensed-design checks outstanding.


SITE 1:100 / TRENCH SECTION NTS

2026-11-08 / E-01 / 24 × 18 in at 100% print

Plumbing & Vastu coordination

RESTROOM DETAIL / Fixture routing / Zoning matrix / Commercial proposal

01 / RESTROOM PLUMBING PLAN

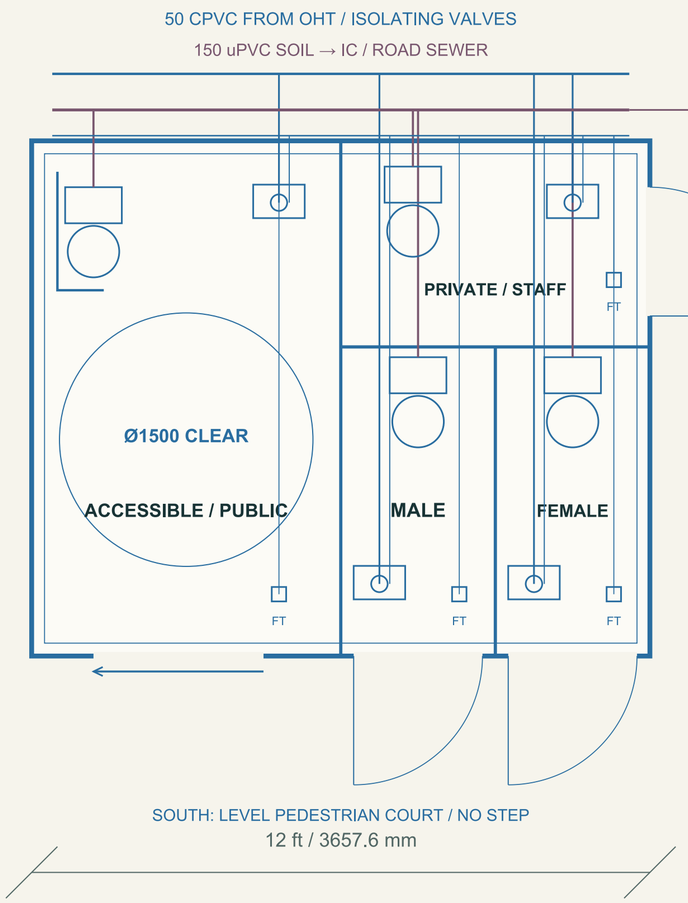

12 × 10 ft gross block. 75 mm indicative partitions.

Public male + female + accessible WC; separate private staff WC.

FT = trapped floor drain. Dashed blue = greywater to bio-filter.

150 mm soil collector → inspection chamber → confirmed sewer.

Dimensions and accessibility clearances require local approval.

02 / VASTU ZONING MATRIX

NW / WC	N / SWAP	NE / OPEN
W / COURT	CENTRE	E / LAWN
SW / ADMIN	S / COURT	SE / CAFÉ

NORTH ↑ / WEST ← ROAD

Rear block: X90–144 / Y0–50 ft.

SE café / kitchen: Agni intent.

SW admin: rear-block Nairutya.

NW WC: rear-block Vayu.

North-centre swap faces driveway.

Site SW: transformer utility yard.

No universal Vastu certification claimed for this coordination set.

Rear-block zoning is distinct from whole-site Vastu quadrants.

03 / FEE, REVISIONS & DELIVERY

□18,000 INR

Estimated lump-sum civil / MEP drawing fee; included in contest.

Unlimited revisions until ground execution sign-off

Initial draft delivered Today

Final stamped GFC working set within 48 hours

Requested service target; conditional on licensed engineer engagement, survey / utility inputs and approvals. This issue is not stamped GFC.

04 / RELEASE CHECKS

Survey & levels · vehicle-specific swept paths · fire access strategy

TSSPDCL yard approval · cable ampacity / fault duty · earthing design

Sewer / culvert invert confirmation · accessible WC & Vastu review